

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


| | | |
|---|---|---|
| Maximum Intensity (Luminaire orientation as tested.) | | 548.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal |
| Beam Spread | At 10% of I _{max} At 50% of I _{max} At 90% of I _{max} | 101.8V x 140.2H 75.7V x 99.7H 38.7V x 47.1H |
| Beam Flux | Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max} | 1040.6 lumens per klm. 999.5 lumens per klm. 789.6 lumens per klm. 261.7 lumens per klm. |
| | Upward LOR Downward LOR | 0.0 % 104.1 % |
| Luminaire Efficiency(Light Output Ratio) | | 104.2 % |

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:li
Test Date:2013-11-14

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity:65.0%
Test Distance:9.630m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

| | | |
|-----------------------------|--------|-------------------|
| NAME: 15Watt | TYPE: | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.: |
| MFR.: Global Tech China Ltd | SUR.: | PROTECTION ANGLE: |

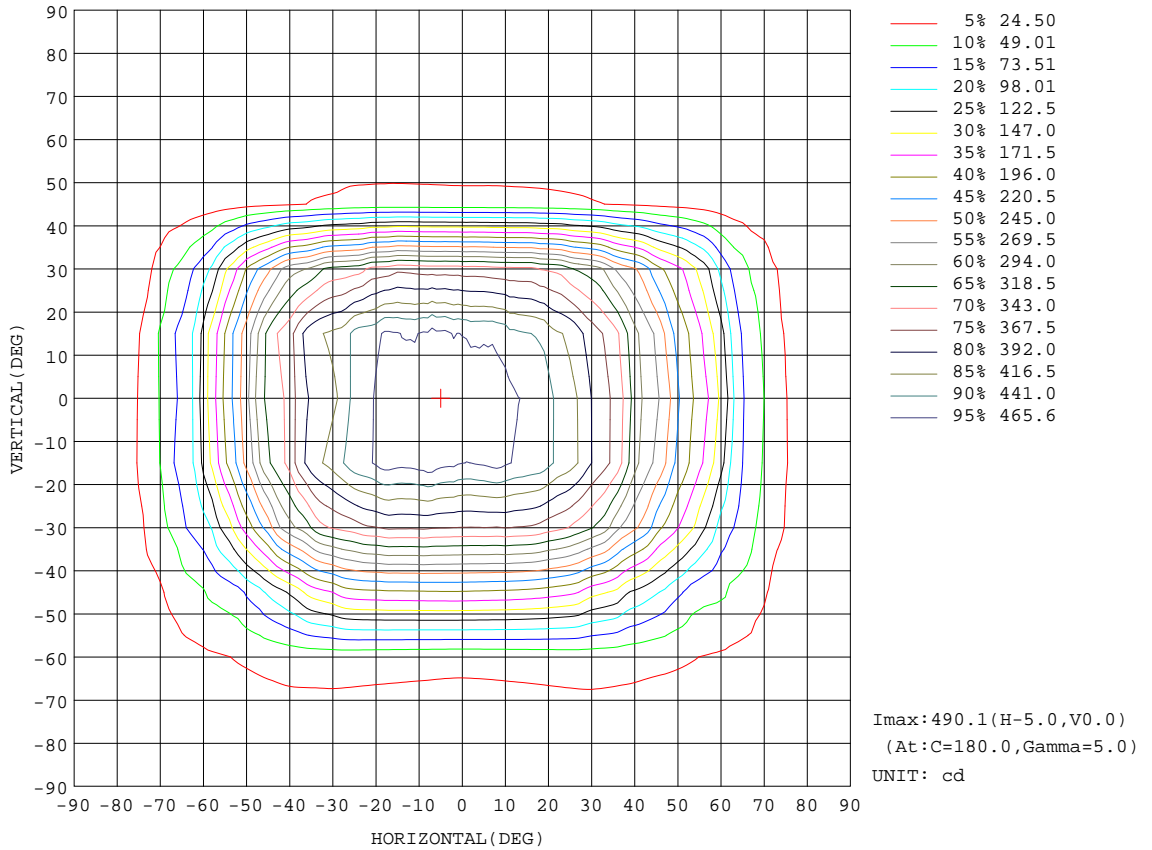


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:li
 Test Date:2013-11-14

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity:65.0%
 Test Distance:9.630m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

| | | |
|-----------------------------|--------|-------------------|
| NAME: 15Watt | TYPE: | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.: |
| MFR.: Global Tech China Ltd | SUR.: | PROTECTION ANGLE: |

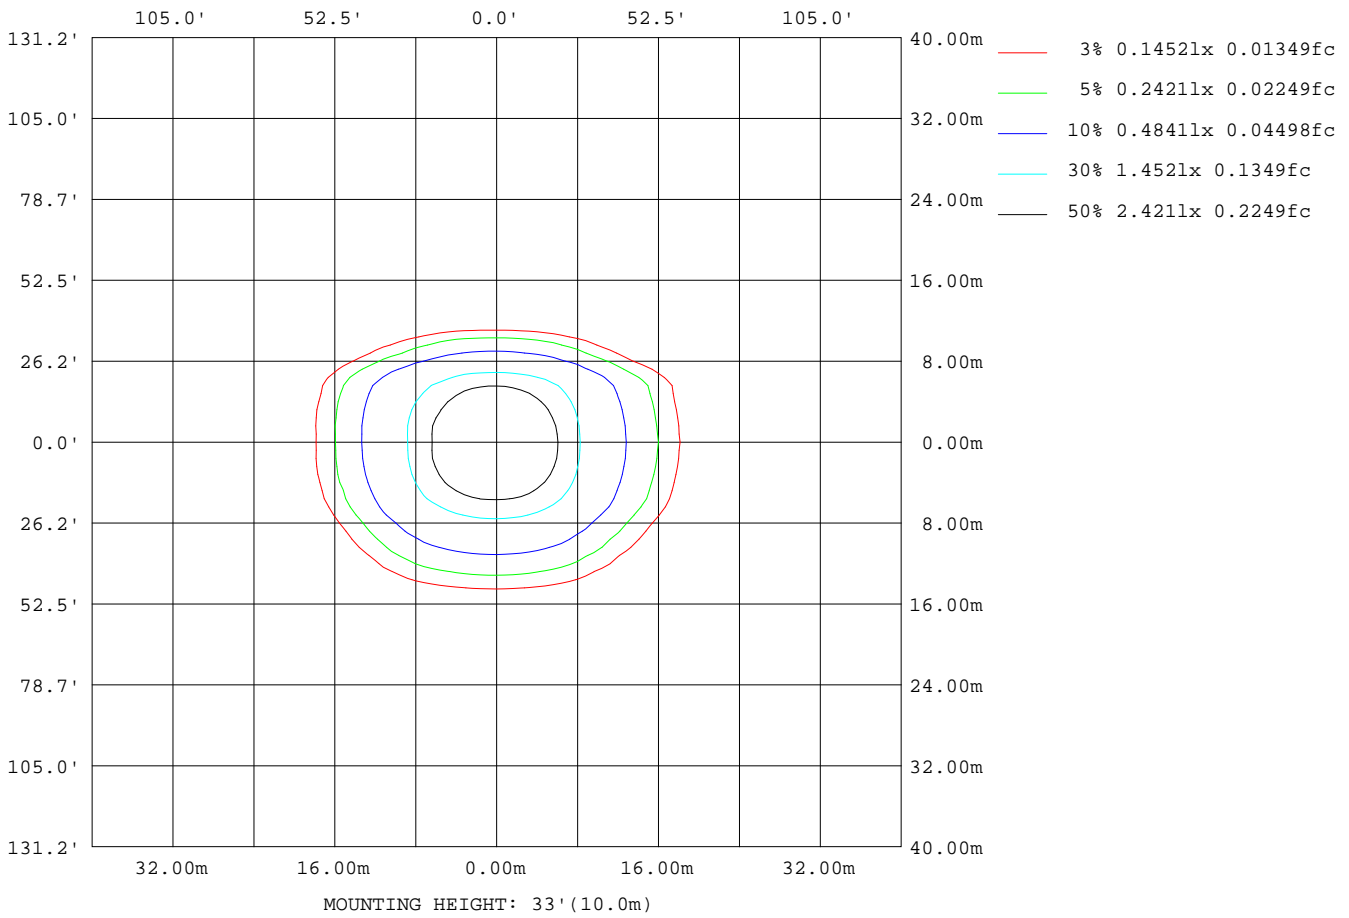


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:li
 Test Date:2013-11-14

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity:65.0%
 Test Distance:9.630m [K=1.0000]
 Remarks:

AAI Figure

| | | |
|-----------------------------|--------|-------------------|
| NAME: 15Watt | TYPE: | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.: |
| MFR.: Global Tech China Ltd | SUR.: | PROTECTION ANGLE: |

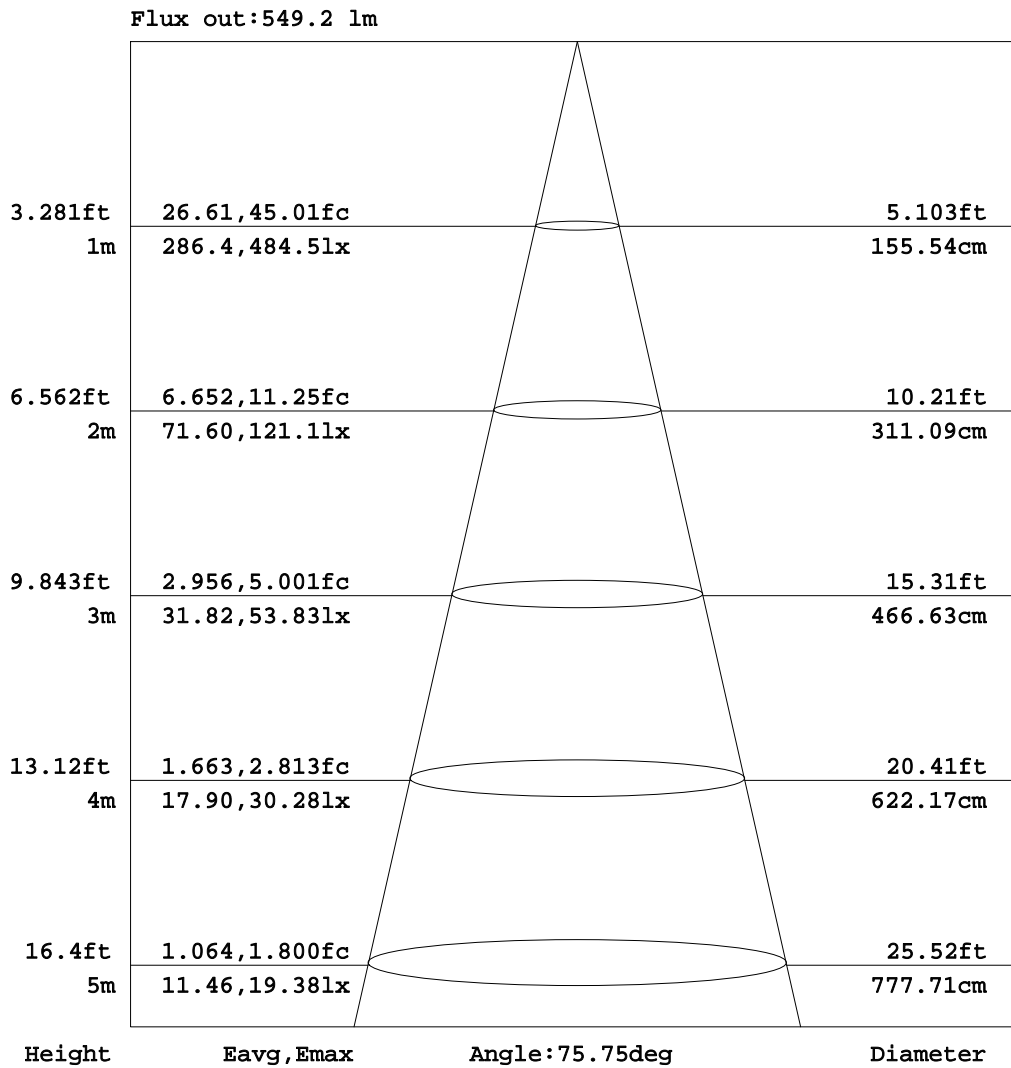


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:li
Test Date:2013-11-14

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity:65.0%
Test Distance:9.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

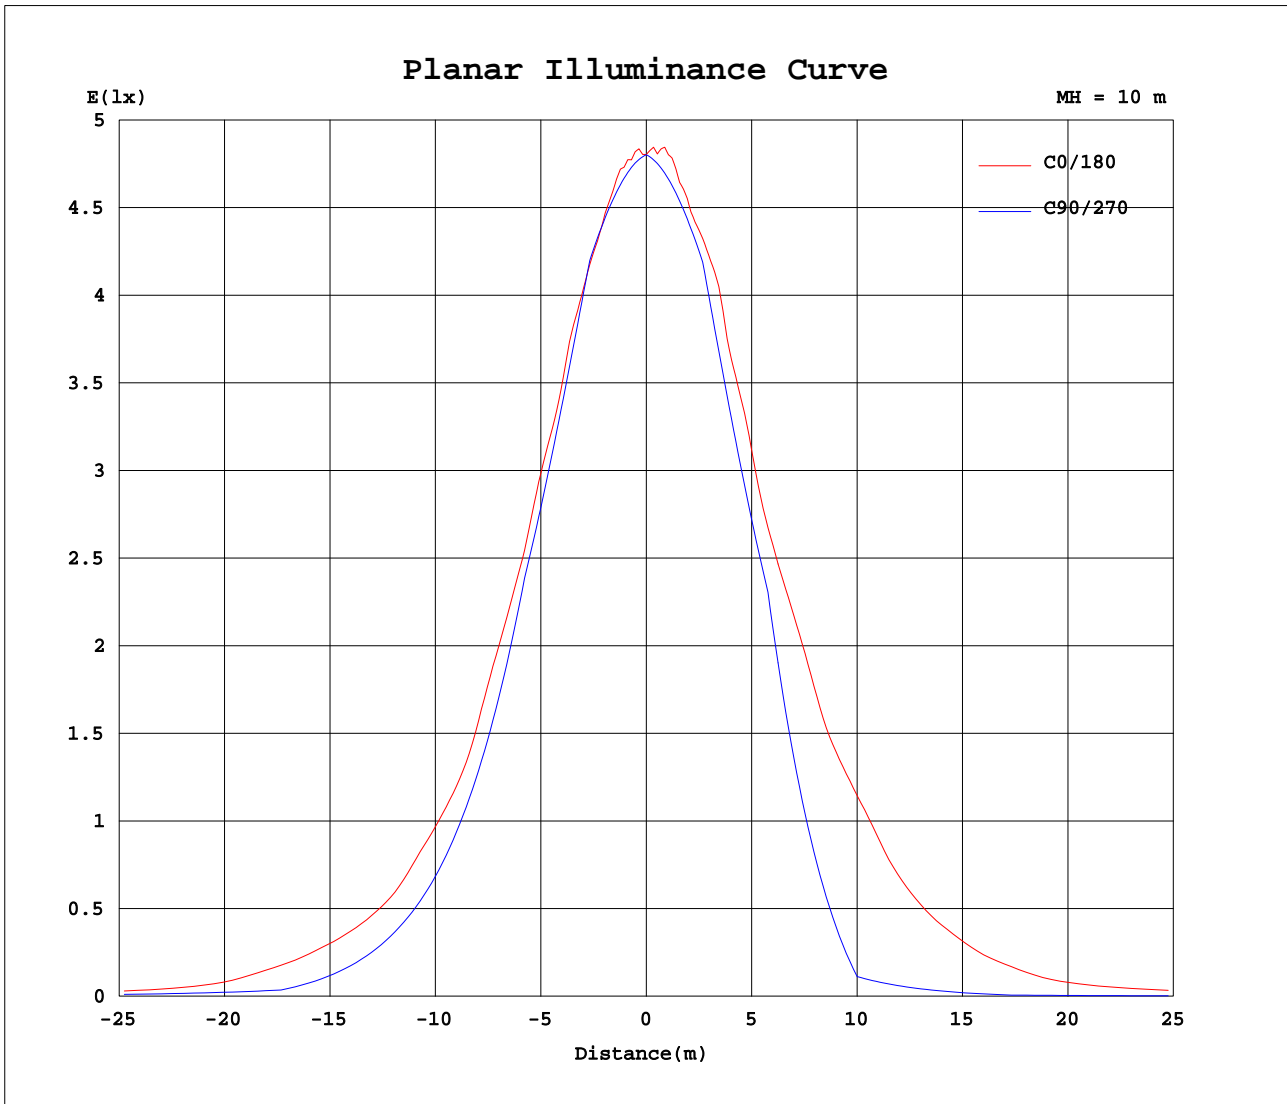

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:li
 Test Date:2013-11-14

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity:65.0%
 Test Distance:9.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|-----------------------------|--------|-------------------|
| NAME: 15Watt | TYPE: | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.: |
| MFR.: Global Tech China Ltd | SUR.: | PROTECTION ANGLE: |

Table--1

UNIT: cd

| H(β) \ V(β) | -90 | -85 | -80 | -75 | -70 | -65 | -60 | -55 | -50 | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -75 | 3.51 | 5.32 | 8.36 | 10.0 | 11.6 | 13.0 | 13.1 | 13.0 | 13.8 | 14.5 | 14.9 | 15.2 | 15.4 | 15.4 | 15.4 | 15.3 | 15.3 | 15.1 | 15.0 |
| -70 | 3.80 | 5.99 | 9.13 | 10.9 | 13.0 | 14.5 | 15.6 | 16.5 | 18.1 | 19.6 | 20.8 | 21.1 | 21.3 | 21.1 | 20.7 | 20.4 | 20.2 | 19.9 | 19.7 |
| -65 | 4.09 | 6.67 | 9.90 | 11.8 | 14.3 | 16.1 | 18.1 | 20.1 | 22.4 | 24.7 | 26.6 | 27.1 | 27.3 | 26.7 | 26.0 | 25.5 | 25.1 | 24.6 | 24.4 |
| -60 | 4.38 | 7.34 | 10.7 | 12.7 | 15.6 | 17.7 | 20.6 | 23.6 | 26.8 | 29.8 | 32.5 | 33.0 | 33.3 | 32.3 | 31.3 | 30.6 | 30.0 | 29.3 | 29.1 |
| -55 | 4.77 | 7.72 | 11.2 | 13.5 | 17.5 | 23.8 | 29.3 | 35.4 | 43.5 | 53.8 | 63.7 | 74.4 | 79.4 | 84.2 | 84.4 | 84.4 | 84.3 | 84.1 | 83.9 |
| -50 | 5.16 | 8.10 | 11.7 | 14.2 | 19.4 | 29.8 | 38.0 | 47.2 | 60.3 | 77.9 | 95.0 | 116 | 126 | 136 | 137 | 138 | 139 | 139 | 139 |
| -45 | 5.54 | 8.48 | 12.3 | 15.0 | 21.3 | 35.9 | 46.7 | 58.9 | 77.1 | 102 | 126 | 157 | 172 | 188 | 191 | 192 | 193 | 194 | 193 |
| -40 | 5.79 | 8.64 | 12.2 | 16.5 | 27.9 | 46.2 | 60.4 | 83.0 | 112 | 145 | 179 | 211 | 230 | 244 | 249 | 252 | 253 | 252 | 251 |
| -35 | 6.04 | 8.81 | 12.0 | 18.0 | 34.5 | 56.5 | 74.2 | 107 | 148 | 189 | 233 | 265 | 287 | 300 | 308 | 311 | 312 | 311 | 309 |
| -30 | 6.29 | 8.97 | 11.9 | 19.4 | 41.2 | 66.8 | 87.9 | 131 | 183 | 232 | 286 | 319 | 345 | 356 | 367 | 371 | 371 | 369 | 367 |
| -25 | 6.43 | 9.16 | 11.5 | 22.3 | 43.9 | 72.5 | 102 | 152 | 206 | 260 | 308 | 348 | 372 | 390 | 401 | 405 | 407 | 404 | 400 |
| -20 | 6.58 | 9.34 | 11.0 | 25.1 | 46.7 | 78.1 | 116 | 172 | 229 | 287 | 330 | 376 | 399 | 423 | 435 | 439 | 442 | 439 | 433 |
| -15 | 6.72 | 9.52 | 10.5 | 27.9 | 49.4 | 83.8 | 130 | 192 | 252 | 315 | 352 | 405 | 427 | 457 | 469 | 473 | 477 | 474 | 466 |
| -10 | 6.75 | 9.39 | 10.4 | 27.4 | 49.8 | 81.8 | 132 | 196 | 256 | 318 | 352 | 402 | 422 | 453 | 470 | 476 | 479 | 479 | 471 |
| -5 | 6.77 | 9.25 | 10.2 | 27.0 | 50.1 | 79.8 | 133 | 199 | 259 | 321 | 352 | 398 | 417 | 450 | 471 | 478 | 481 | 485 | 475 |
| 0 | 6.79 | 9.12 | 10.0 | 26.5 | 50.4 | 77.9 | 135 | 202 | 263 | 324 | 353 | 395 | 412 | 447 | 471 | 480 | 482 | 490 | 480 |
| 5 | 6.61 | 8.78 | 9.74 | 25.5 | 50.7 | 78.7 | 134 | 200 | 261 | 324 | 355 | 399 | 415 | 447 | 466 | 476 | 477 | 483 | 475 |
| 10 | 6.42 | 8.44 | 9.47 | 24.5 | 51.1 | 79.6 | 132 | 199 | 259 | 324 | 358 | 403 | 418 | 448 | 462 | 471 | 472 | 477 | 470 |
| 15 | 6.24 | 8.11 | 9.21 | 23.5 | 51.4 | 80.4 | 130 | 197 | 257 | 324 | 360 | 407 | 422 | 448 | 457 | 467 | 466 | 470 | 465 |
| 20 | 5.99 | 7.29 | 8.85 | 19.3 | 45.2 | 72.3 | 116 | 179 | 237 | 296 | 335 | 371 | 390 | 409 | 422 | 432 | 430 | 432 | 428 |
| 25 | 5.74 | 6.47 | 8.50 | 15.0 | 39.0 | 64.3 | 102 | 161 | 218 | 267 | 309 | 335 | 358 | 371 | 387 | 397 | 395 | 394 | 392 |
| 30 | 5.49 | 5.65 | 8.14 | 10.7 | 32.8 | 56.2 | 88.0 | 143 | 198 | 239 | 283 | 299 | 326 | 332 | 352 | 362 | 359 | 357 | 355 |
| 35 | 5.26 | 5.32 | 7.82 | 9.71 | 24.7 | 40.7 | 62.5 | 99.9 | 138 | 166 | 196 | 208 | 227 | 232 | 246 | 252 | 250 | 249 | 247 |
| 40 | 5.02 | 4.99 | 7.50 | 8.69 | 16.6 | 25.3 | 37.0 | 56.8 | 77.4 | 92.7 | 109 | 117 | 127 | 132 | 139 | 143 | 141 | 140 | 140 |
| 45 | 4.79 | 4.65 | 7.18 | 7.66 | 8.46 | 9.82 | 11.6 | 13.8 | 17.0 | 19.5 | 22.1 | 25.7 | 27.9 | 31.7 | 32.7 | 33.1 | 32.8 | 32.3 | 32.0 |
| 50 | 4.58 | 4.42 | 6.78 | 7.23 | 7.82 | 8.86 | 10.1 | 11.6 | 13.7 | 15.4 | 17.1 | 19.5 | 20.9 | 23.4 | 23.9 | 24.2 | 23.9 | 23.5 | 23.2 |
| 55 | 4.37 | 4.19 | 6.39 | 6.80 | 7.18 | 7.89 | 8.61 | 9.35 | 10.4 | 11.3 | 12.1 | 13.2 | 13.9 | 15.0 | 15.2 | 15.2 | 15.0 | 14.7 | 14.5 |
| 60 | 4.17 | 3.96 | 6.00 | 6.36 | 6.55 | 6.93 | 7.12 | 7.14 | 7.12 | 7.13 | 7.11 | 7.04 | 6.94 | 6.70 | 6.44 | 6.24 | 6.08 | 5.96 | 5.83 |
| 65 | 4.01 | 3.83 | 5.34 | 5.72 | 5.98 | 6.25 | 6.43 | 6.47 | 6.48 | 6.53 | 6.54 | 6.51 | 6.45 | 6.30 | 6.12 | 5.98 | 5.87 | 5.76 | 5.67 |
| 70 | 3.85 | 3.70 | 4.69 | 5.09 | 5.42 | 5.56 | 5.73 | 5.80 | 5.85 | 5.92 | 5.97 | 5.98 | 5.96 | 5.90 | 5.80 | 5.72 | 5.65 | 5.57 | 5.51 |
| 75 | 3.70 | 3.57 | 4.03 | 4.45 | 4.85 | 4.88 | 5.04 | 5.13 | 5.21 | 5.32 | 5.40 | 5.45 | 5.47 | 5.50 | 5.48 | 5.46 | 5.44 | 5.37 | 5.36 |
| 80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:li
 Test Date:2013-11-14

V(β) Range:-75 - 75DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity:65.0%
 Test Distance:9.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|-----------------------------|--------|-------------------|
| NAME: 15Watt | TYPE: | WEIGHT: |
| DIM.: | SPEC.: | SERIAL No.: |
| MFR.: Global Tech China Ltd | SUR.: | PROTECTION ANGLE: |

Table--2

UNIT: cd

| H(DEG) V(DEG) | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|--|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| -80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| -75 | 15.0 | 15.2 | 15.2 | 15.2 | 15.3 | 15.2 | 14.9 | 14.3 | 14.1 | 14.2 | 14.4 | 14.3 | 14.2 | 12.8 | 11.4 | 9.98 | 7.80 | 3.97 | |
| -70 | 19.8 | 20.1 | 20.4 | 20.8 | 21.2 | 21.4 | 20.8 | 19.9 | 19.0 | 18.4 | 17.8 | 16.7 | 15.7 | 13.9 | 12.2 | 10.6 | 8.28 | 4.24 | |
| -65 | 24.6 | 25.1 | 25.6 | 26.3 | 27.1 | 27.6 | 26.7 | 25.6 | 24.0 | 22.7 | 21.1 | 19.2 | 17.1 | 14.9 | 12.9 | 11.2 | 8.76 | 4.52 | |
| -60 | 29.4 | 30.0 | 30.8 | 31.8 | 33.0 | 33.8 | 32.7 | 31.2 | 28.9 | 26.9 | 24.4 | 21.6 | 18.6 | 16.0 | 13.7 | 11.8 | 9.24 | 4.80 | |
| -55 | 83.7 | 83.6 | 83.2 | 82.3 | 80.8 | 74.4 | 69.8 | 60.2 | 52.7 | 43.9 | 35.6 | 32.0 | 25.7 | 19.5 | 14.1 | 12.0 | 9.33 | 5.05 | |
| -50 | 138 | 137 | 136 | 133 | 129 | 115 | 107 | 89.2 | 76.5 | 60.8 | 46.9 | 42.5 | 32.8 | 23.1 | 14.5 | 12.2 | 9.42 | 5.31 | |
| -45 | 192 | 191 | 188 | 183 | 176 | 156 | 144 | 118 | 100 | 77.7 | 58.1 | 52.9 | 39.9 | 26.6 | 15.0 | 12.4 | 9.52 | 5.56 | |
| -40 | 251 | 250 | 247 | 240 | 231 | 210 | 191 | 162 | 136 | 109 | 83.4 | 64.4 | 49.2 | 31.7 | 17.8 | 12.1 | 9.42 | 5.74 | |
| -35 | 309 | 309 | 306 | 297 | 286 | 265 | 237 | 205 | 171 | 141 | 109 | 75.8 | 58.4 | 36.9 | 20.5 | 11.9 | 9.32 | 5.92 | |
| -30 | 368 | 369 | 365 | 354 | 341 | 320 | 284 | 249 | 207 | 172 | 134 | 87.2 | 67.7 | 42.0 | 23.3 | 11.6 | 9.22 | 6.09 | |
| -25 | 401 | 402 | 397 | 385 | 370 | 344 | 310 | 267 | 226 | 187 | 148 | 102 | 69.6 | 43.1 | 24.0 | 10.9 | 9.13 | 6.15 | |
| -20 | 435 | 436 | 428 | 416 | 398 | 368 | 336 | 285 | 245 | 201 | 163 | 116 | 71.6 | 44.3 | 24.7 | 10.2 | 9.04 | 6.21 | |
| -15 | 469 | 469 | 460 | 447 | 427 | 392 | 363 | 302 | 264 | 215 | 177 | 131 | 73.6 | 45.4 | 25.4 | 9.53 | 8.94 | 6.26 | |
| -10 | 474 | 471 | 461 | 448 | 425 | 392 | 363 | 304 | 267 | 218 | 180 | 135 | 74.5 | 46.5 | 25.3 | 9.30 | 8.84 | 6.22 | |
| -5 | 478 | 473 | 462 | 449 | 424 | 392 | 363 | 306 | 271 | 221 | 183 | 138 | 75.3 | 47.6 | 25.2 | 9.07 | 8.73 | 6.17 | |
| 0 | 483 | 474 | 463 | 450 | 423 | 392 | 363 | 309 | 274 | 224 | 186 | 142 | 76.2 | 48.7 | 25.1 | 8.84 | 8.63 | 6.12 | |
| 5 | 476 | 468 | 456 | 443 | 419 | 388 | 360 | 306 | 271 | 220 | 183 | 139 | 74.6 | 47.5 | 24.6 | 8.54 | 7.82 | 5.89 | |
| 10 | 469 | 462 | 449 | 436 | 416 | 384 | 357 | 303 | 268 | 217 | 180 | 135 | 73.0 | 46.2 | 24.0 | 8.25 | 7.01 | 5.67 | |
| 15 | 462 | 456 | 442 | 428 | 412 | 381 | 354 | 301 | 265 | 213 | 177 | 131 | 71.4 | 44.9 | 23.5 | 7.95 | 6.19 | 5.44 | |
| 20 | 426 | 420 | 411 | 399 | 382 | 356 | 327 | 283 | 245 | 201 | 165 | 118 | 67.4 | 42.4 | 21.0 | 7.72 | 5.78 | 5.24 | |
| 25 | 390 | 385 | 380 | 369 | 352 | 332 | 299 | 265 | 226 | 189 | 153 | 105 | 63.3 | 40.0 | 18.4 | 7.49 | 5.36 | 5.03 | |
| 30 | 354 | 350 | 349 | 340 | 322 | 307 | 272 | 247 | 206 | 177 | 141 | 91.1 | 59.2 | 37.5 | 15.9 | 7.26 | 4.94 | 4.82 | |
| 35 | 247 | 244 | 243 | 237 | 224 | 213 | 189 | 171 | 143 | 124 | 98.7 | 64.9 | 43.0 | 27.9 | 13.1 | 7.17 | 4.69 | 4.70 | |
| 40 | 139 | 138 | 137 | 133 | 126 | 120 | 106 | 96.3 | 81.1 | 70.2 | 56.6 | 38.7 | 26.8 | 18.3 | 10.3 | 7.08 | 4.45 | 4.58 | |
| 45 | 31.9 | 31.6 | 30.9 | 29.9 | 28.2 | 25.9 | 23.5 | 21.1 | 18.8 | 16.7 | 14.5 | 12.5 | 10.5 | 8.67 | 7.43 | 6.99 | 4.20 | 4.45 | |
| 50 | 23.2 | 23.1 | 22.7 | 22.1 | 21.1 | 19.7 | 18.1 | 16.6 | 15.0 | 13.6 | 12.1 | 10.8 | 9.44 | 8.12 | 7.19 | 6.78 | 4.10 | 4.32 | |
| 55 | 14.6 | 14.6 | 14.5 | 14.3 | 14.0 | 13.4 | 12.7 | 12.0 | 11.2 | 10.5 | 9.69 | 9.05 | 8.37 | 7.58 | 6.95 | 6.57 | 4.01 | 4.18 | |
| 60 | 6.00 | 6.11 | 6.24 | 6.46 | 6.85 | 7.14 | 7.30 | 7.45 | 7.45 | 7.37 | 7.29 | 7.31 | 7.30 | 7.03 | 6.70 | 6.37 | 3.91 | 4.04 | |
| 65 | 5.81 | 5.89 | 6.01 | 6.20 | 6.49 | 6.71 | 6.84 | 6.94 | 6.96 | 6.90 | 6.86 | 6.87 | 6.87 | 6.69 | 6.38 | 5.93 | 3.81 | 3.93 | |
| 70 | 5.61 | 5.68 | 5.78 | 5.94 | 6.13 | 6.28 | 6.37 | 6.44 | 6.46 | 6.43 | 6.42 | 6.44 | 6.44 | 6.35 | 6.05 | 5.50 | 3.70 | 3.82 | |
| 75 | 5.41 | 5.47 | 5.56 | 5.67 | 5.77 | 5.85 | 5.91 | 5.94 | 5.96 | 5.96 | 5.99 | 6.00 | 6.00 | 6.00 | 5.72 | 5.07 | 3.60 | 3.71 | |
| 80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | |

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:li
Test Date:2013-11-14

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity:65.0%
Test Distance:9.630m [K=1.0000]
Remarks: